


TECHNICAL DATA

THIS DOCUMENT IS NOT CONTRACTUAL

33/C
ROLOK

ROLOK SCREW

61 avenue de l'Europe - 78140 Vélizy-Villacoublay - Tel : 00 33 (0)1 78 74 32 00 - Fax : 00 33 (0)1 78 74 32 01

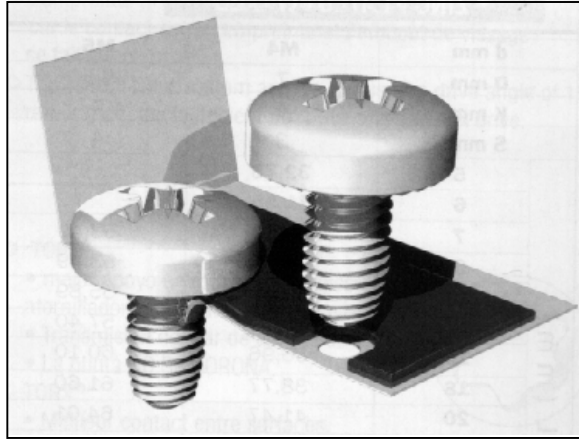

Special thread permits doing high performance fastenings on thin plates (steel and aluminium).


High resistance to tightening torque

Form of the screw end provokes an extrusion of the plate that forms an elongatio and a reinforcement of the threaded part of the plate..


Resists to unscrewing b vibration thanks to trilobular form.

Reduction of costs : use of nuts and notched washers is avoided.

DIMENSIONS AND CHOICE

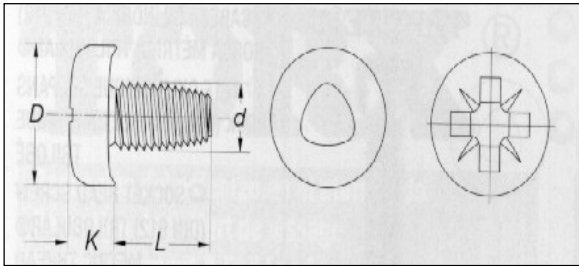

d mm		M3	M4	M5
D mm		6	8	10
K mm		2,4	3,1	3,8
		Z1	Z2	Z2
L (mm)	6			
	7			
	8			

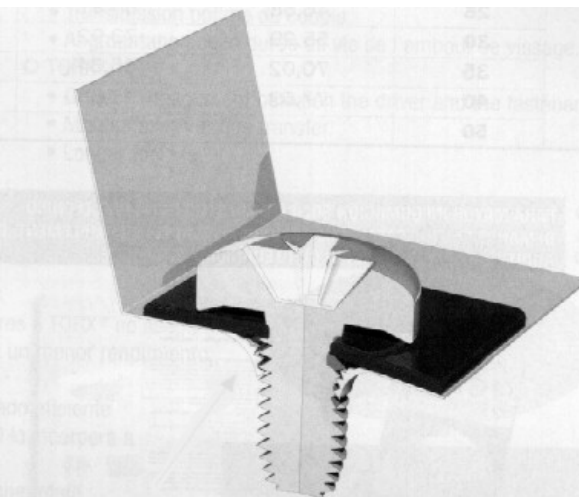

The screws form a nut into thin sheets either in steel or aluminium.